

UNIKEG® 1/6 Barrel Specifications

ALL UNIKEGS
ARE PRE FLUSHED
WITH NITROGEN



General

Cycle	single use
Pre-pressure	20 psi \pm 4 psi (1.4 bar \pm 0.3 bar)
Filling	upside down or straight up
Connection	D
Fill before	< 9 months after production

Dimensions/weight

Volume	5.16 gal US (19.53 liters)
Diameter	9.45 in (240 mm)
Height	22.13 in (562 mm)
Weight	2.65 lbs US (1.2 kg)

Shelf life

Empty UniKeg : Depending on storage conditions, on average 9 months.

Filled UniKeg : Depending on filled product and storage conditions.


Mechanical properties

Temperature range	32-104°F / 0-40°C
Max. dispense pressure	60 psi (4.1 bar)
Max. working pressure	87 psi (6 bar)



Materials UniKeg 1/6 Barrel

Gripring	Recycled PP
Container	PET + barrier
Closure	Glass fibre reinforced PA
Gas valve	PP
Fluid valve	PP
Spring SS	Stainless Steel (AISI 301)
Basket	PP
Spear	PE
Sleeve	PE
Basecup	Recycled PP

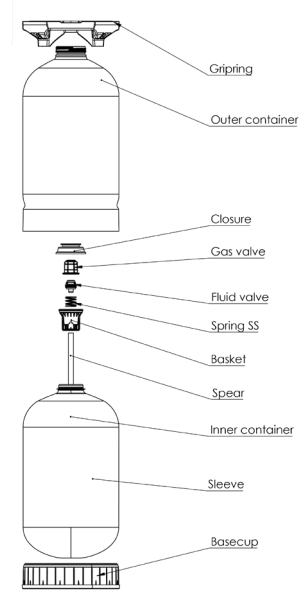

All food contact materials are approved according to regulations FDA 21 CFR 177.1520, EC 1935/2004, EU 10/2011 and/or further amendments.

